


DIMENSIONS

UNDER BODY FLAT-PLATE DIMENSIONS

X5U980P08

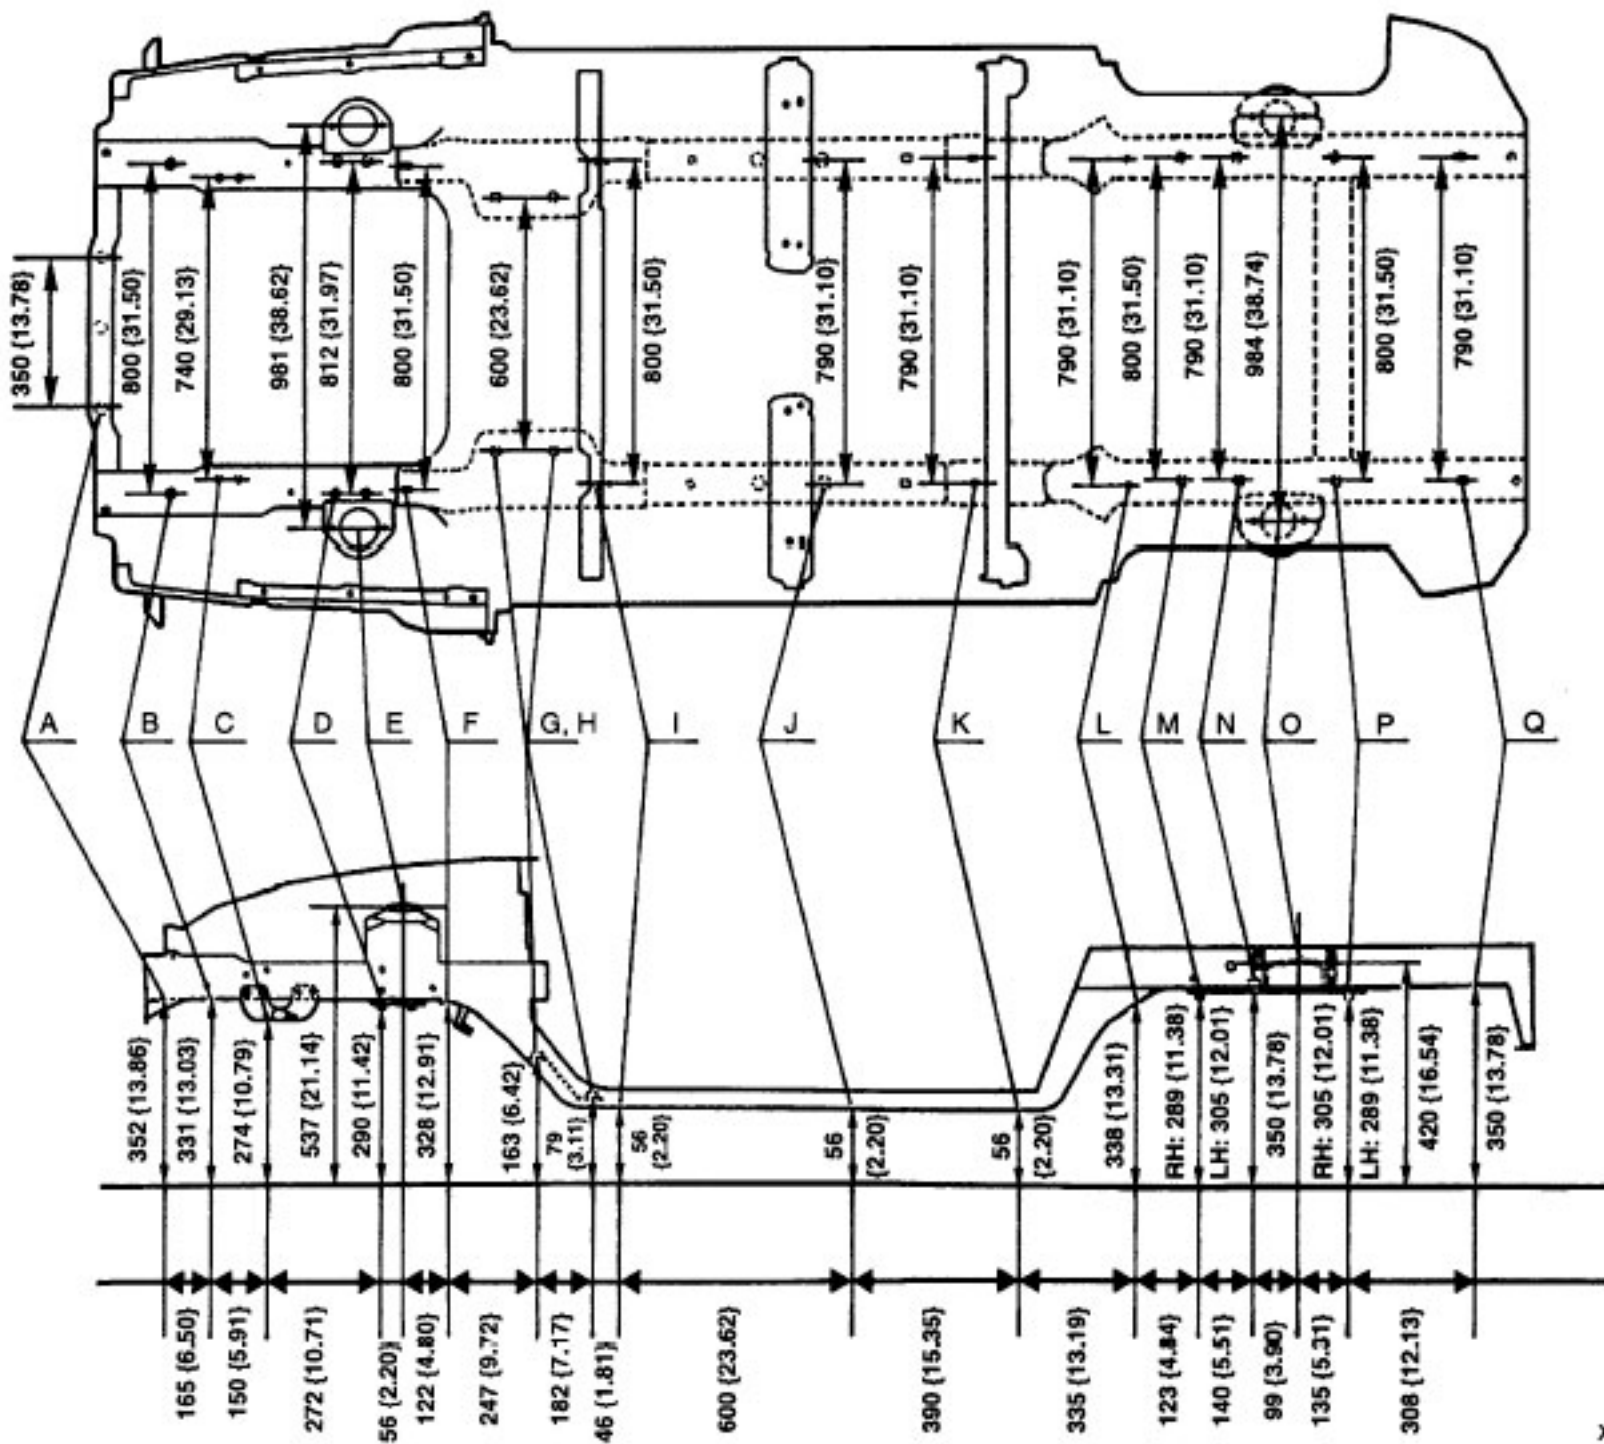

mm (in)
X5U980PAU


Point symbol	Designation	Hole diameter or nut size (mm {in})
A	Crossmember No.1 standard hole	φ15 {0.59}
B	Front side frame standard hole	φ16 {0.63}
C	Stabilizer mounting nut	M10 {0.40}
D	Front suspension mounting bolt	M14 {0.55}
E	Front suspension mounting block surface hole center	φ60 {2.36}
F	Front frame, rear standard hole	φ12 × 18 {0.47 × 0.71}
G	Front suspension mounting nut	M12 {0.47}
H	Front suspension mounting nut	M12 {0.47}
I	Front frame, rear standard hole	φ12 {0.47}

Point symbol	Designation	Hole diameter or nut size (mm {in})
J	Front frame, rear standard hole	φ20 {0.79}
K	Rear frame, front standard hole	φ12 × 18 {0.47 × 0.71}
L	Rear frame, front standard hole	φ12 {0.47}
M	Rear suspension mounting bolt	M12 {0.47}
N	Suspension mounting nut	φ16 {0.63}
O	Rear suspension mounting block surface hole center	φ66 {2.60}
P	Rear suspension mounting bolt	M12 {0.47}
Q	Rear side frame standard hole	φ16 × 22 {0.63 × 0.87}

DIMENSIONS


UNDER BODY STRAIGHT-LINE DIMENSIONS

X5U980P09

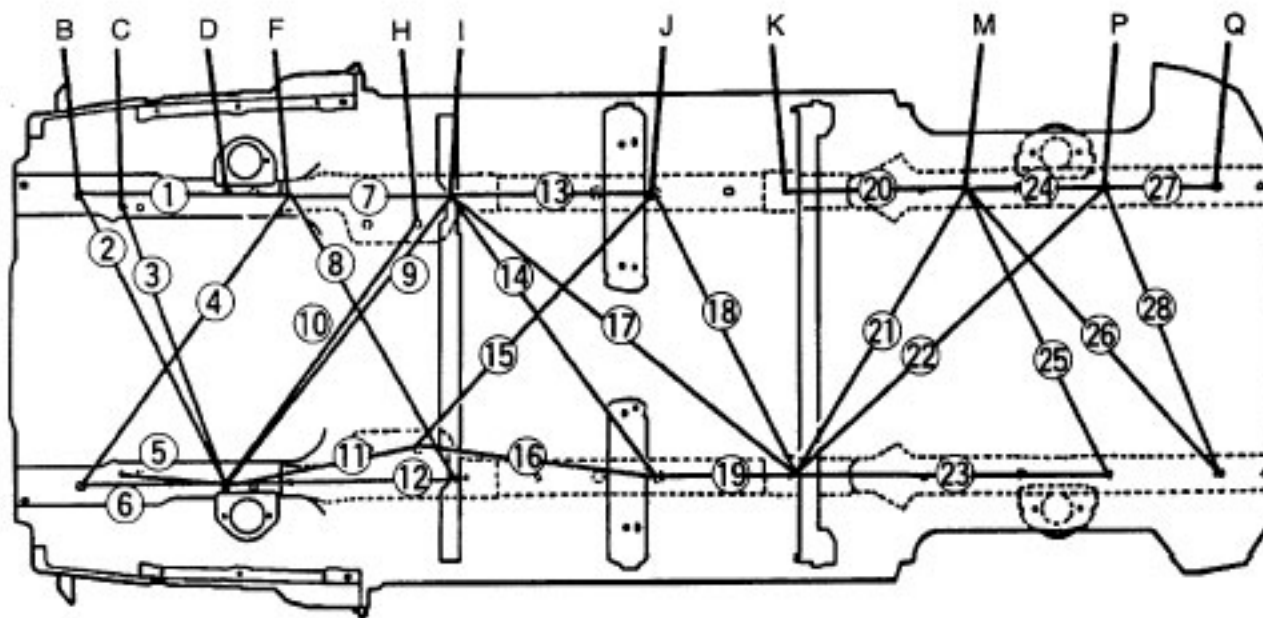


80A

X5U980PAV

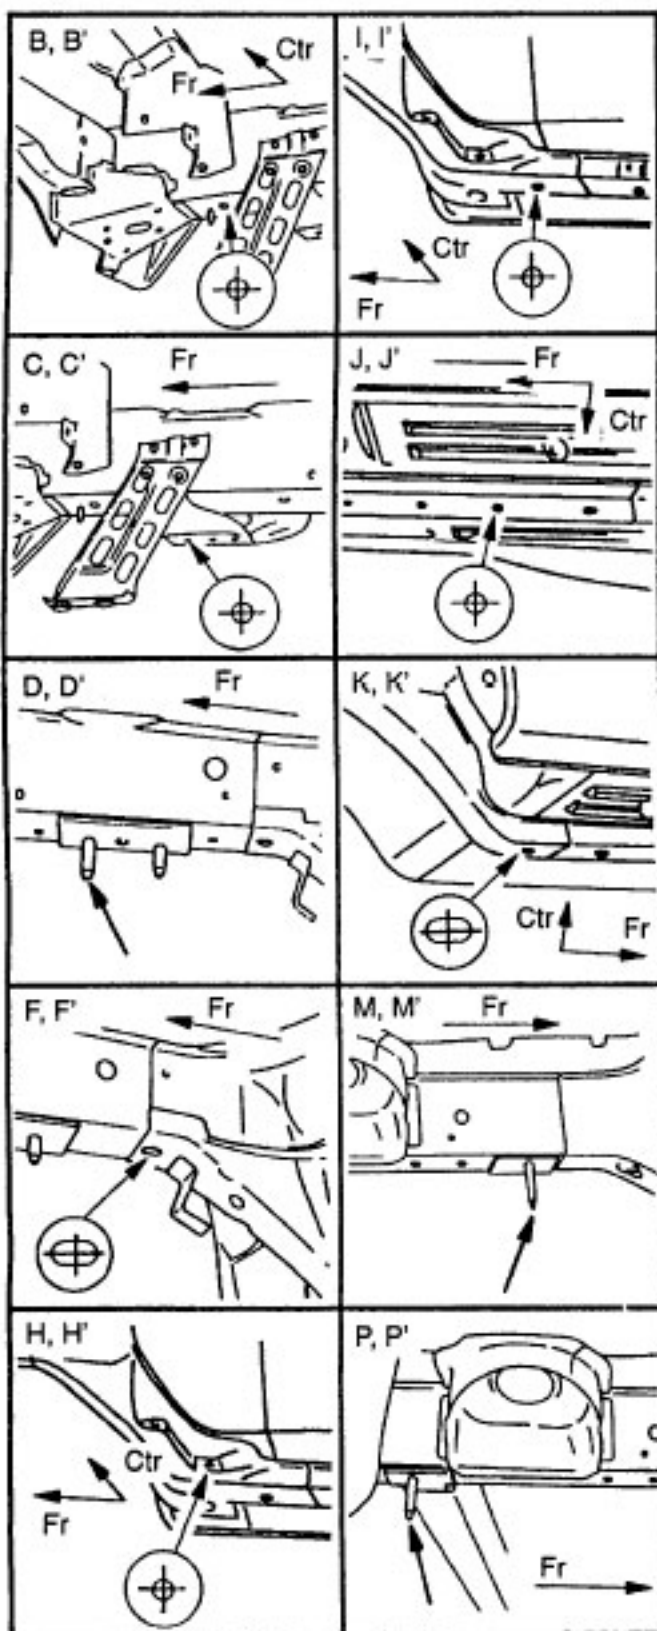

X5U980PAW

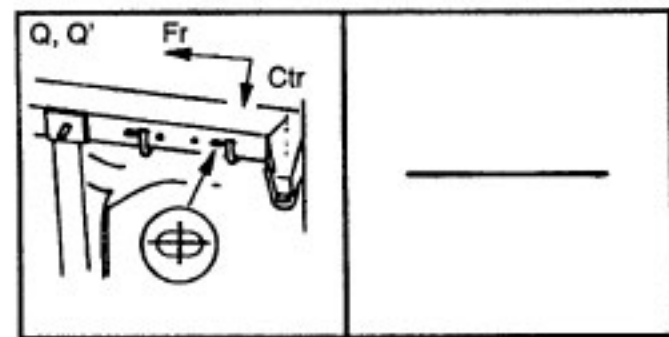

X5U980PAX


Measured location	Dimensions (mm (in))	
1	600 (23.62)	
2	911 (35.87)	
3	822 (32.36)	
4	1000 (39.37)	
5	275 (10.83)	
6	424 (16.69)	
7	547 (21.54)	
8	969 (38.15)	
9	1063 (41.85)	
10	955 (37.60)	
11	651 (25.63)	
12	694 (27.32)	
13	600 (23.62)	
14	996 (39.21)	
15	949 (37.36)	
16	653 (25.71)	
17	1270 (50.00)	
18	881 (34.69)	
19	390 (15.35)	
20	RH: 514 (20.24)	LH: 521 (20.51)
21	RH: 951 (37.44)	LH: 947 (37.28)
22	RH: 1174 (46.22)	LH: 1177 (46.34)
23	RH: 868 (34.17)	LH: 864 (34.02)
24	374 (14.72)	
25	883 (34.76)	
26	RH: 1049 (41.30)	LH: 1048 (41.26)
27	RH: 311 (12.24)	LH: 314 (12.36)
28	RH: 854 (33.62)	LH: 855 (33.66)

X5U980PAY


DIMENSIONS

FRONT BODY STRAIGHT-LINE DIMENSIONS (1)

X5U980P10

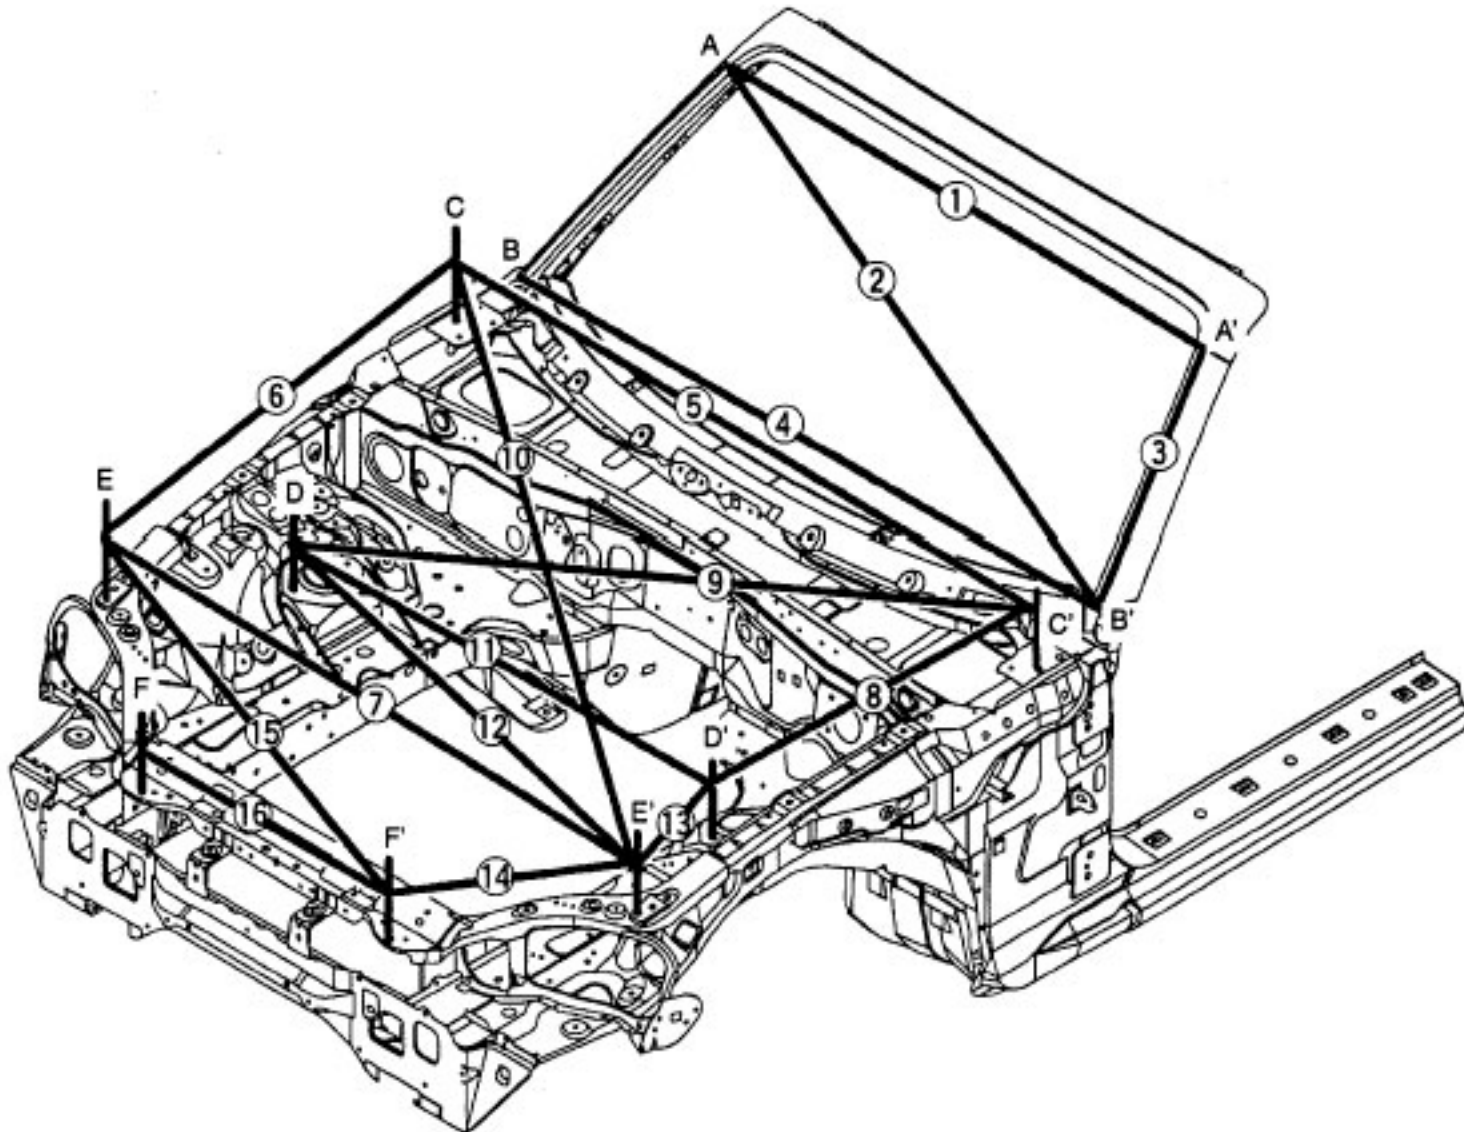

X5U980PAZ

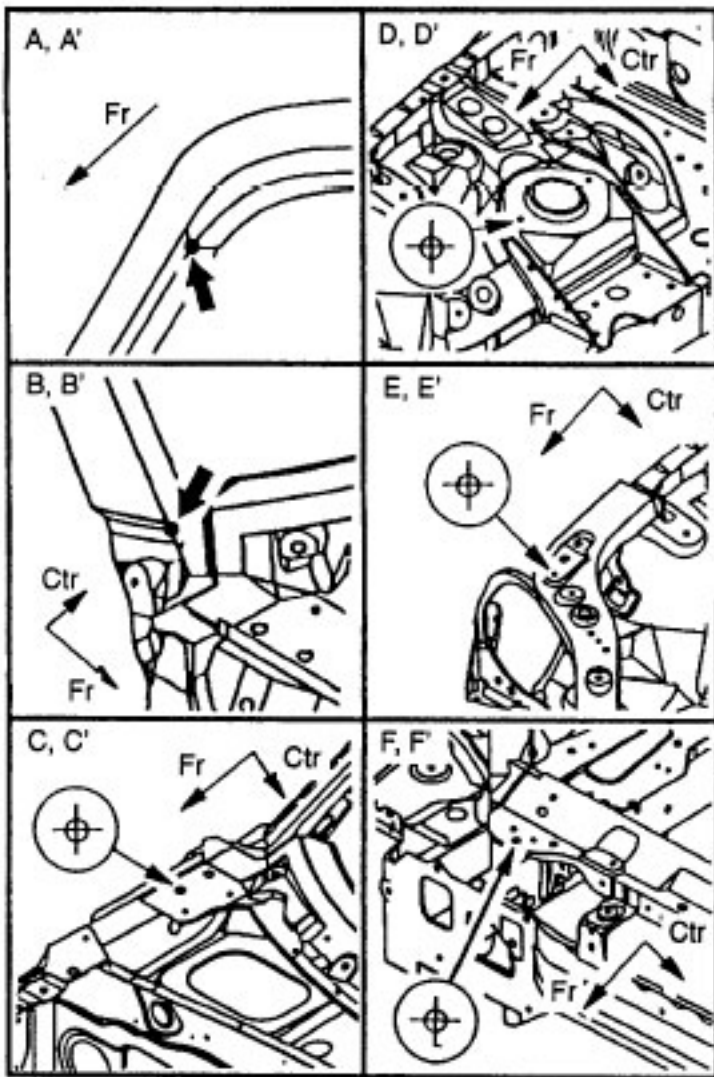

X5U980PB0

Measured location	Dimensions (mm (in))
1	1118 (44.02)
2	1314 (51.73)
3	468 (18.43)
4	1350 (53.15)
5	1378 (54.25)
6	880 (34.65)
7	1244 (48.98)
8	619 (24.37)
9	1317 (51.85)
10	1577 (62.09)
11	980 (38.58)
12	1156 (45.51)
13	342 (13.46)
14	425 (16.73)
15	950 (37.40)
16	580 (22.83)


X5U980PB1

DIMENSIONS


FRONT BODY STRAIGHT-LINE DIMENSIONS (2)

X5U980P11

80A

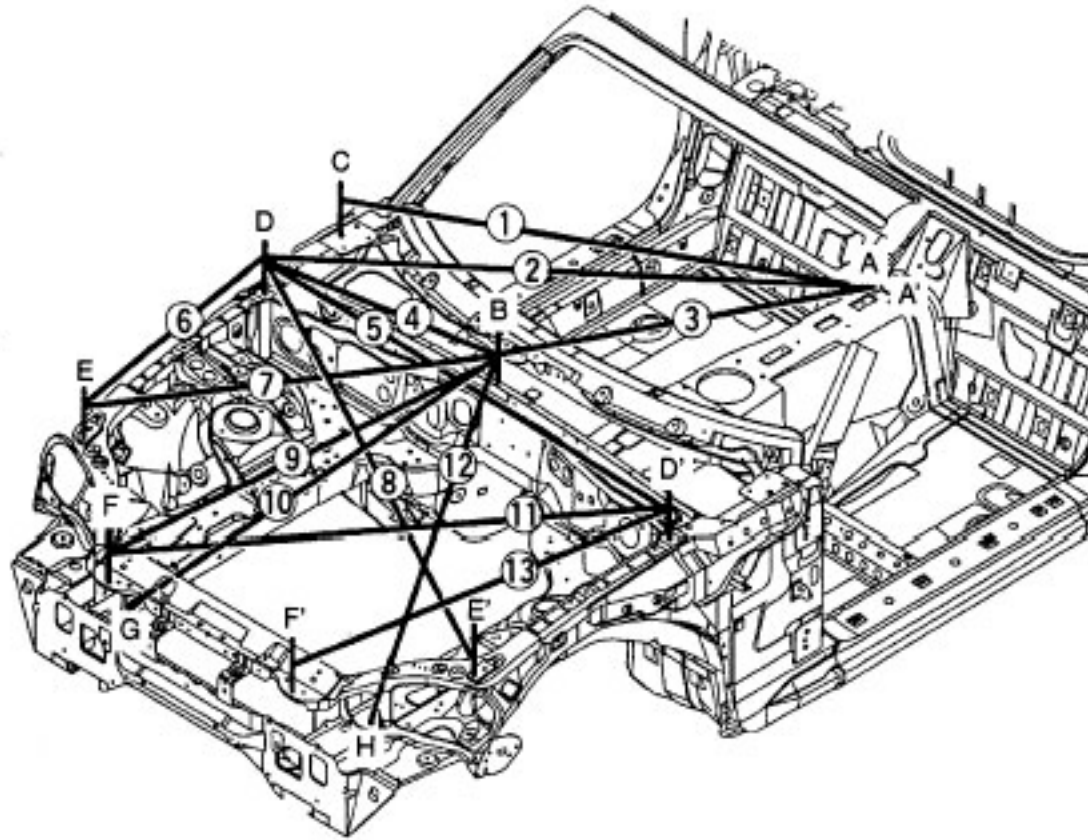

X5U980PB2

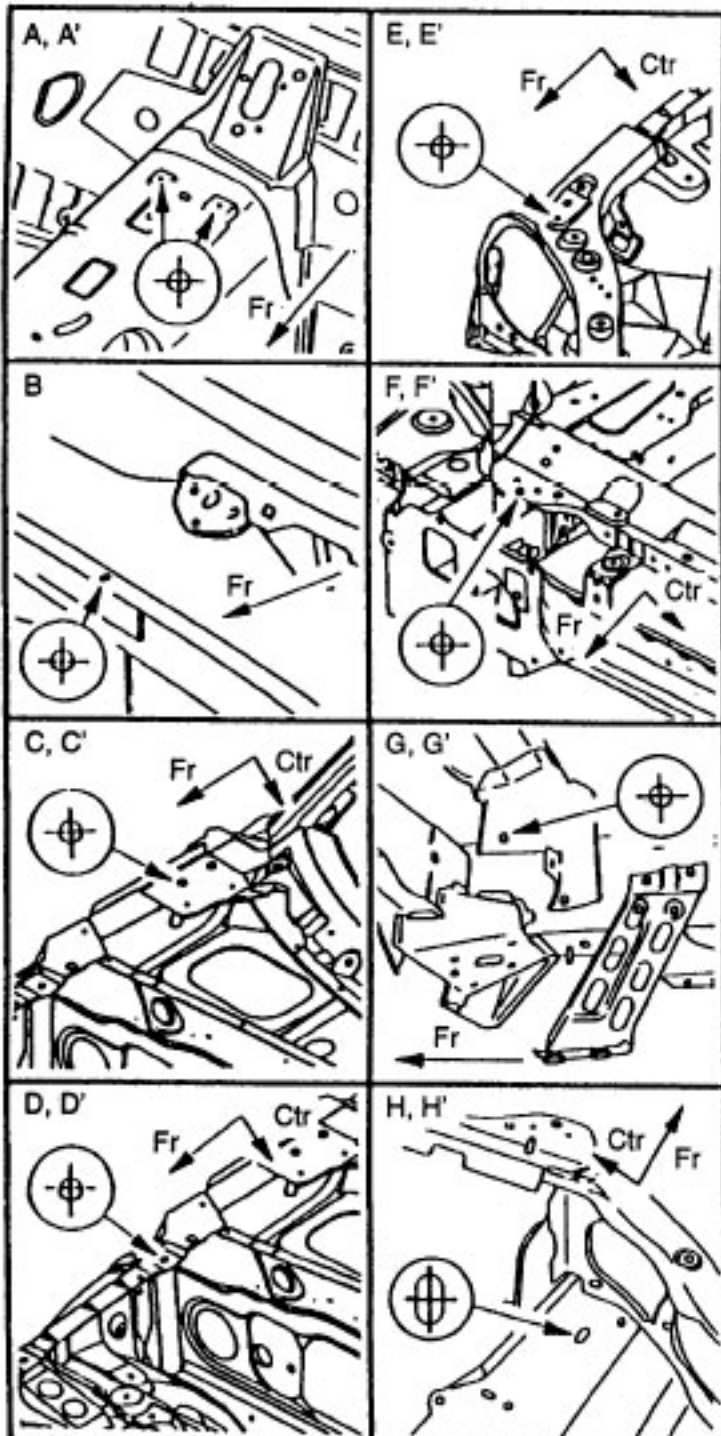

X5U980PB3


Measured location	Dimensions (mm (in))
1	1292 (50.87)
2	1513 (59.57)
3	1300 (51.18)
4	657 (25.87)
5	1298 (51.10)
6	600 (23.62)
7	937 (36.89)
8	1405 (55.31)
9	1006 (39.61)
10	1004 (39.53)
11	1275 (50.20)
12	945 (37.20)
13	934 (36.77)

X5U980PB4


DIMENSIONS

FRONT BODY STRAIGHT-LINE DIMENSIONS (3)

X5U980P12

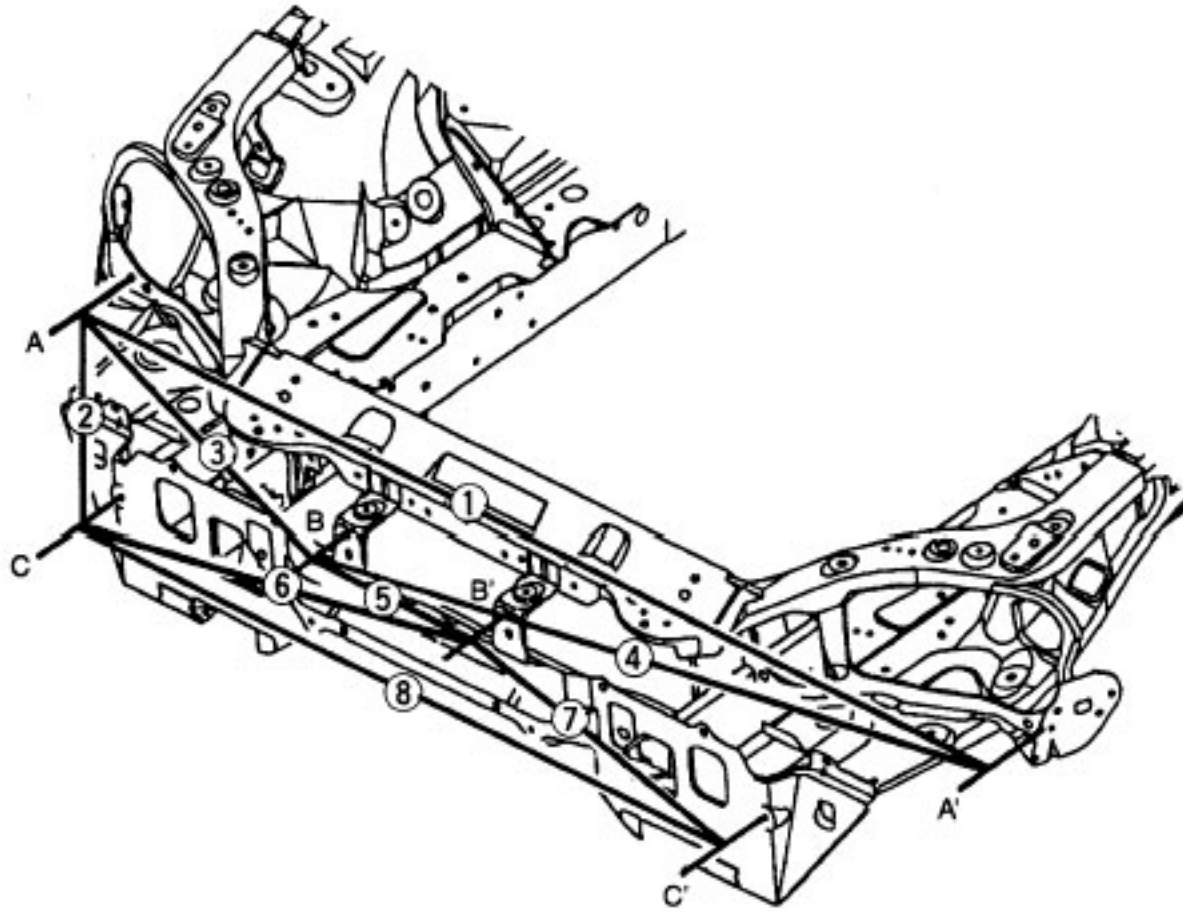

X5U980PB5

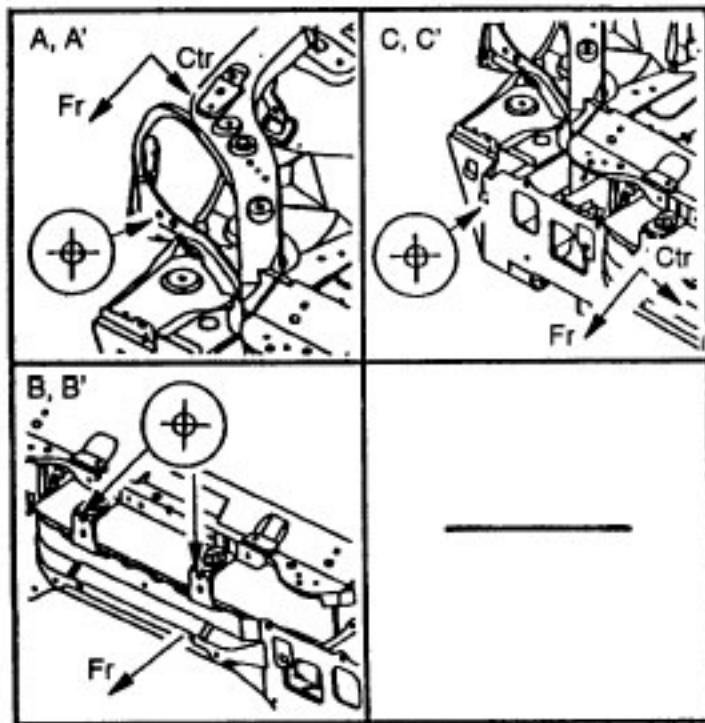

X5U980PB6


Measured location	Dimensions (mm (in))
1	1370 (53.94)
2	321 (12.64)
3	623 (24.53)
4	847 (33.35)
5	240 (9.45)
6	618 (24.33)
7	386 (15.20)
8	972 (38.27)

X5U980PB7

DIMENSIONS


CABIN SIDE FRAME STRAIGHT-LINE DIMENSIONS

X5U980P13

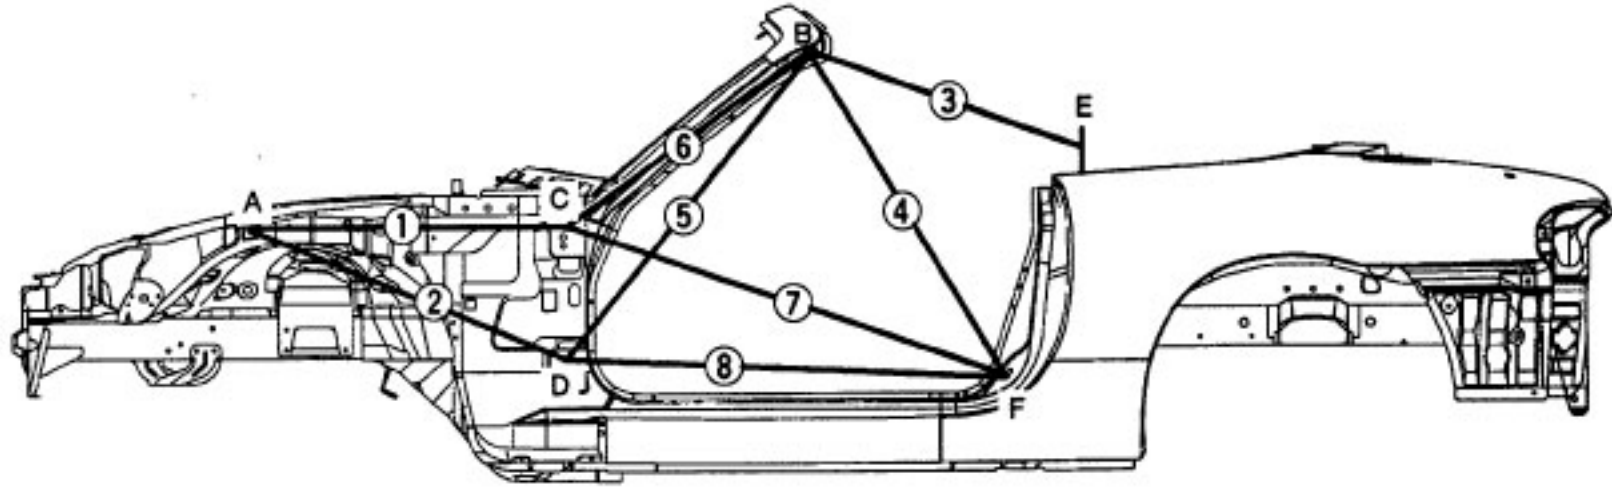

80A

X5U980PB8

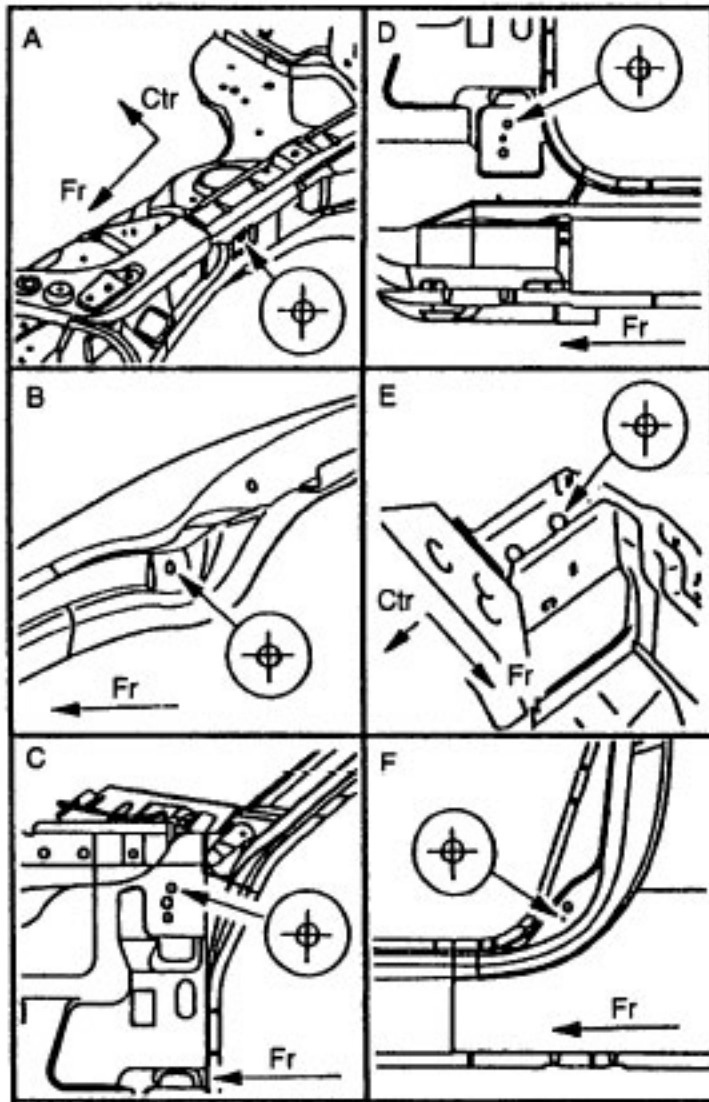

Measured location	Dimensions (mm (in))
1	721 (28.39)
2	780 (30.71)
3	768 (30.24)
4	876 (34.49)
5	909 (35.79)
6	715 (28.15)
7	1074 (42.28)
8	1019 (40.12)


X5U980PBA

X5U980PB9


DIMENSIONS

ROOM STRAIGHT-LINE DIMENSIONS (1)

X5U980P14

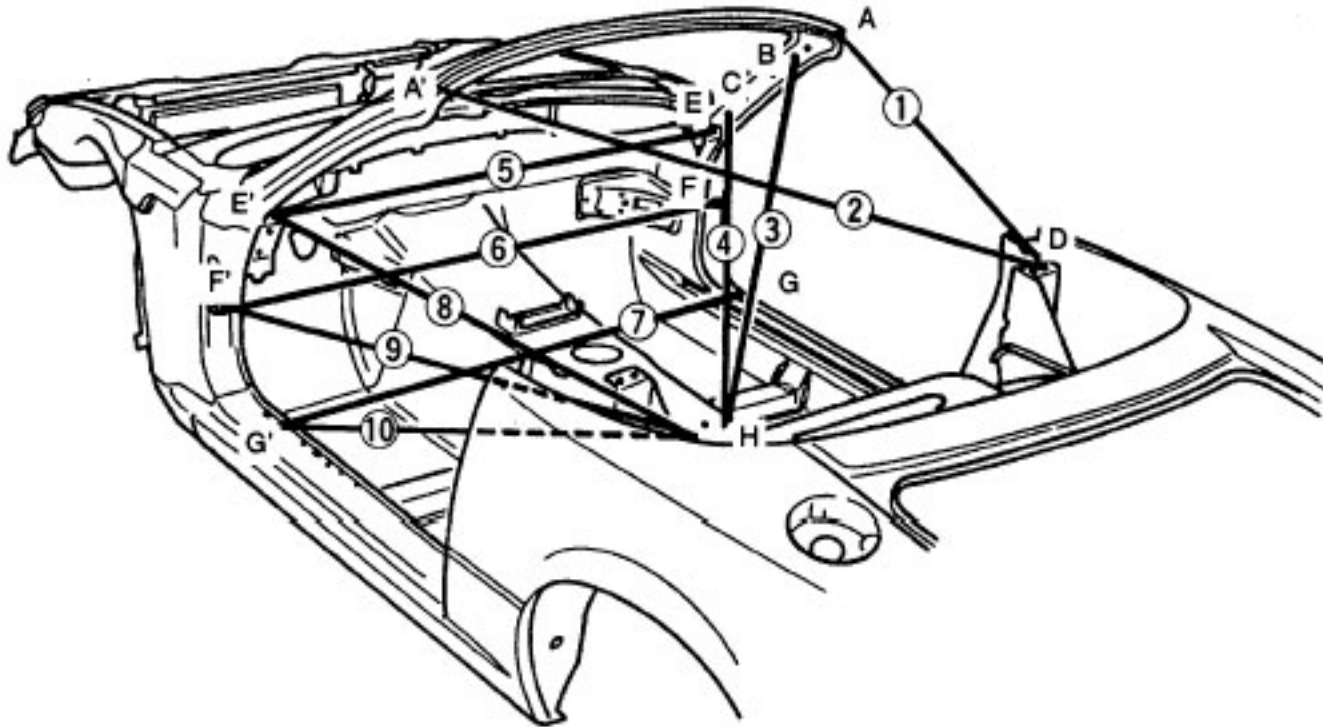

X5U980PBB

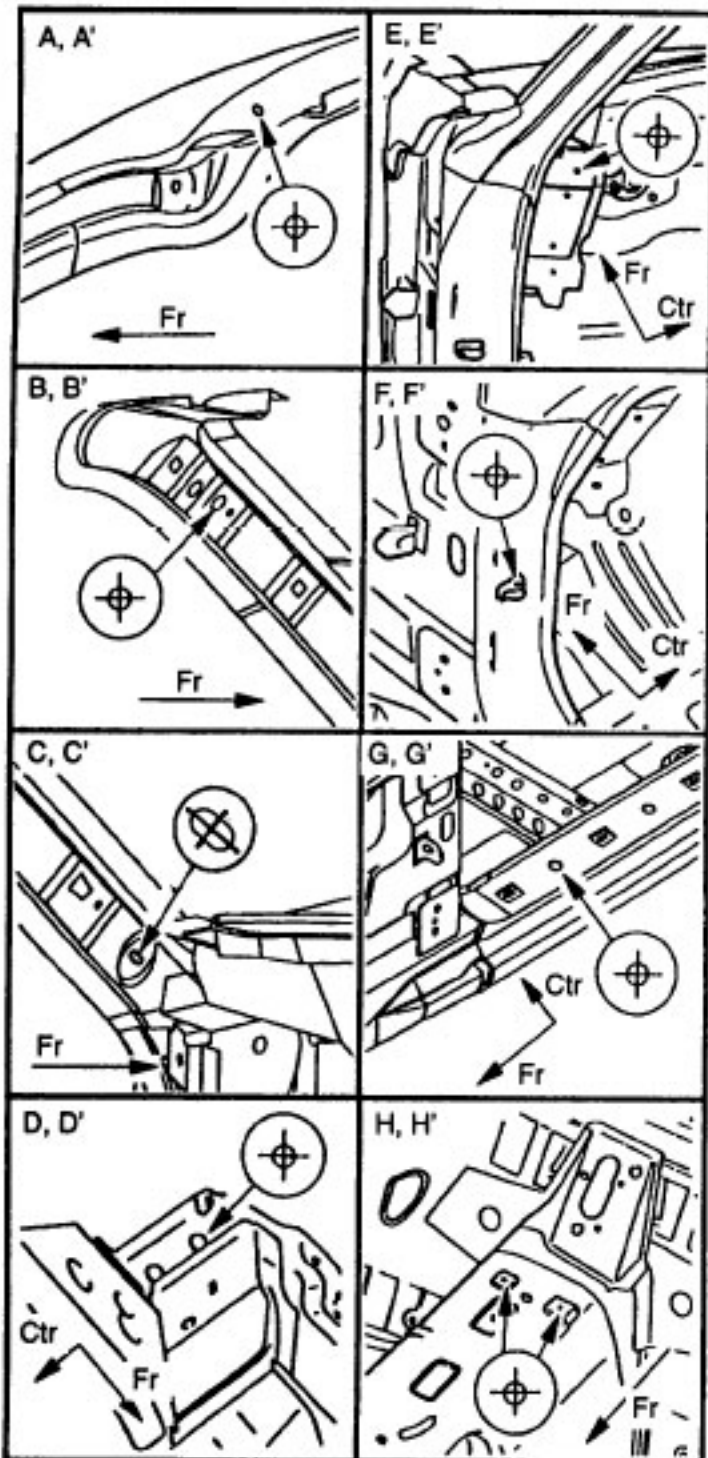

X5U980PBC

Measured location	Dimensions (mm (in))
1	770 (30.31)
2	1338 (52.68)
3	965 (37.99)
4	1108 (43.62)
5	1253 (49.33)
6	1426 (56.14)
7	1410 (55.51)
8	1089 (42.87)
9	1158 (45.59)
10	970 (38.19)


X5U980PBD

DIMENSIONS


ROOM STRAIGHT-LINE DIMENSIONS (2)

X5U980P15

80A

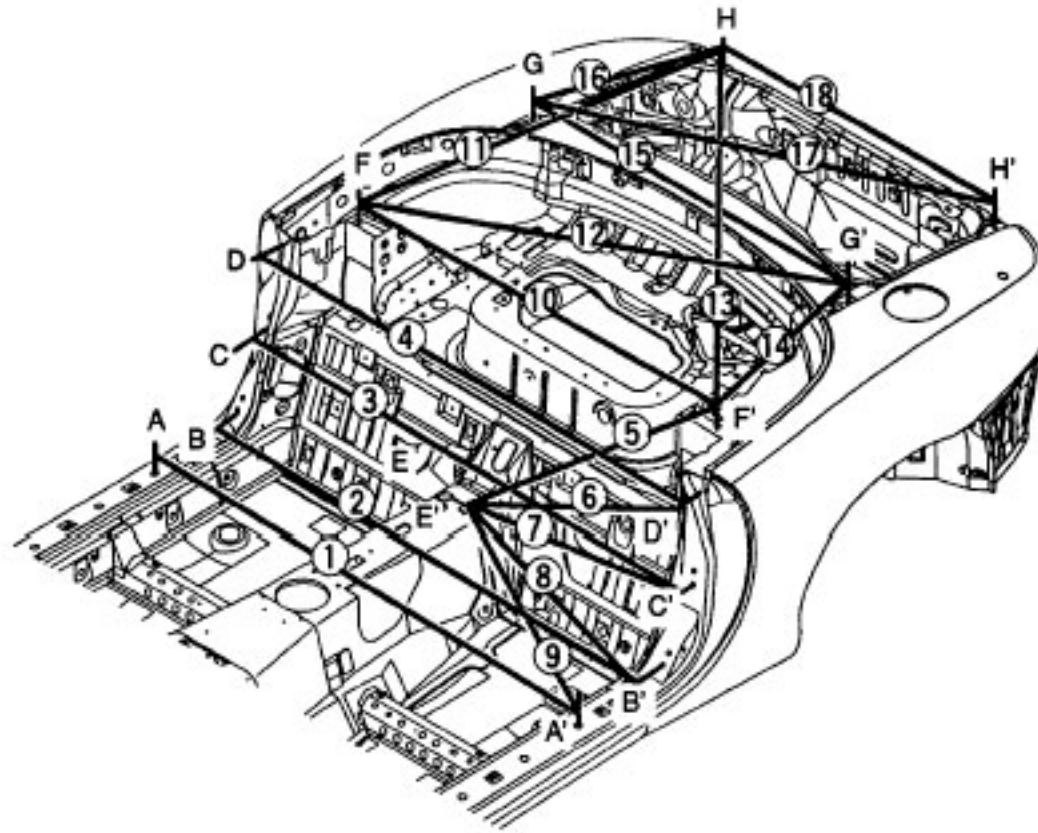

X5U980PBE

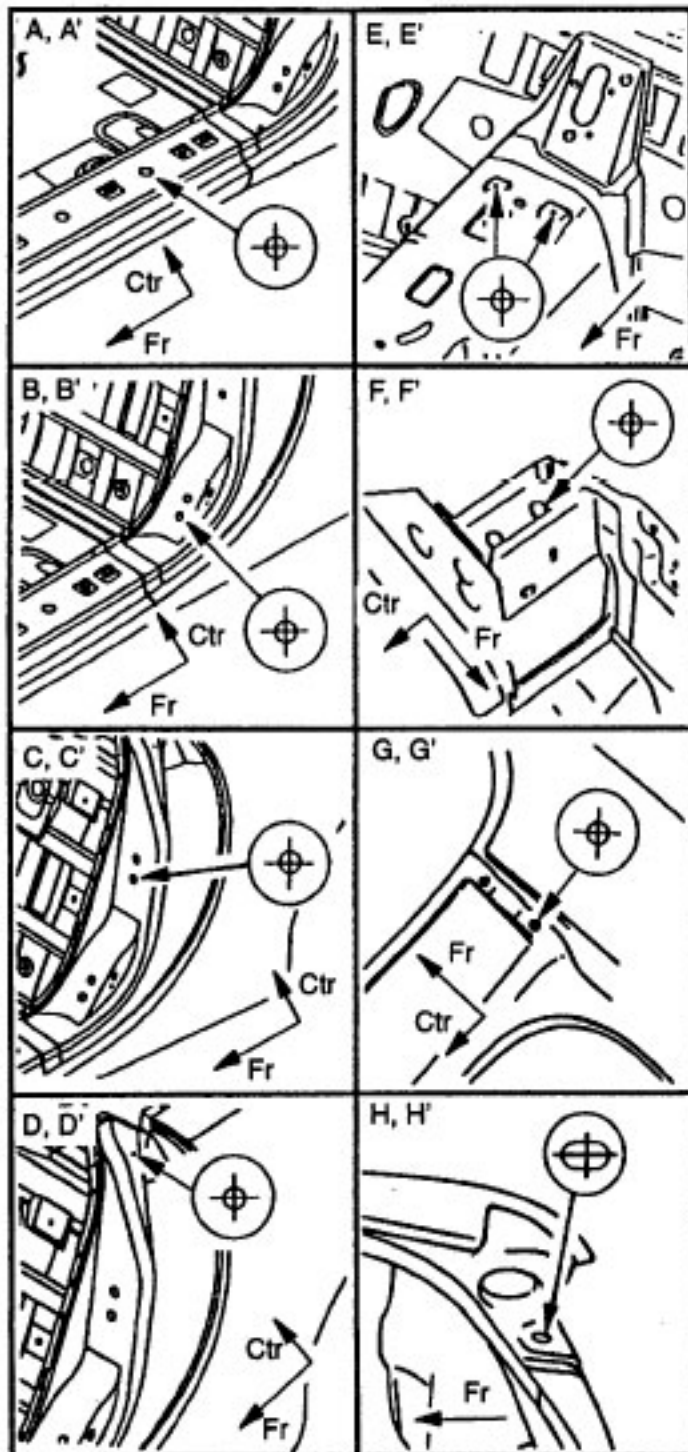

X5U980PBF


Measured location	Dimensions (mm (in))
1	1410 (55.51)
2	1422 (55.98)
3	1420 (55.91)
4	1390 (54.72)
5	689 (27.13)
6	740 (29.13)
7	686 (27.01)
8	682 (26.85)
9	744 (29.29)
10	1130 (44.49)
11	1087 (42.80)
12	1205 (47.44)
13	1476 (58.11)
14	526 (20.71)
15	1041 (40.98)
16	573 (22.56)
17	1116 (43.94)
18	882 (34.72)

X5U980PBG


DIMENSIONS

REAR BODY STRAIGHT-LINE DIMENSIONS

X5U980P16

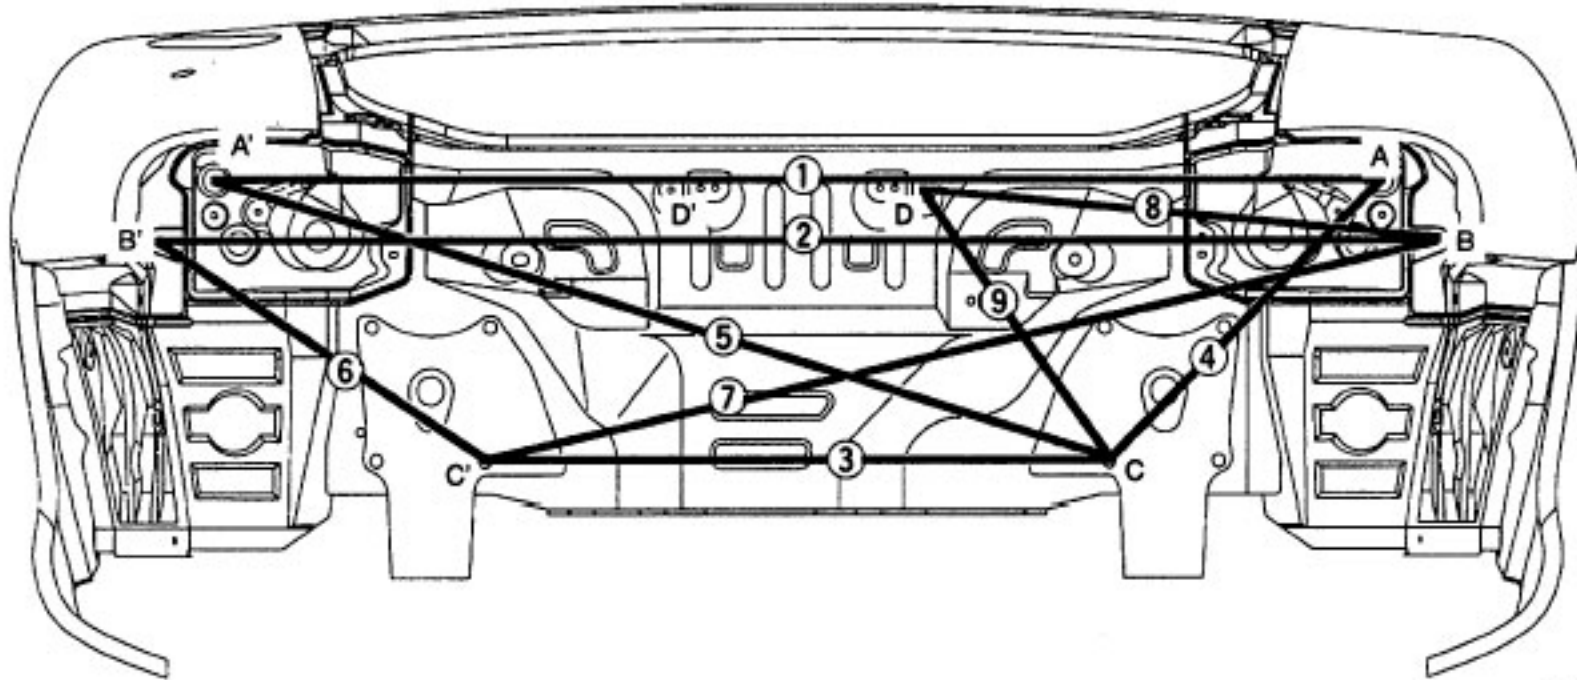

X5U980PBH

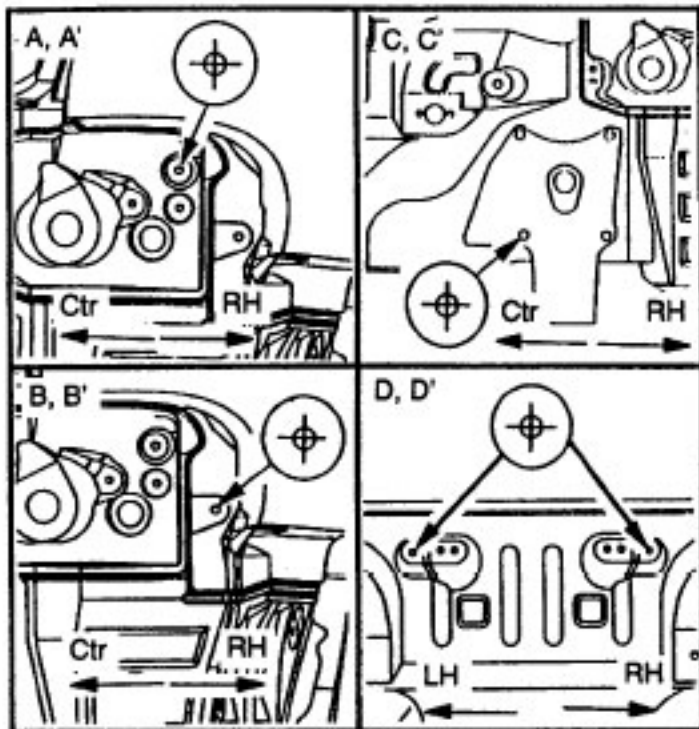

X5U980PBJ

Measured location	Dimensions (mm (in))
1	1250 (49.21)
2	1366 (53.78)
3	674 (26.54)
4	417 (16.42)
5	1008 (39.69)
6	423 (16.65)
7	1048 (41.26)
8	569 (22.40)
9	354 (13.94)

X5U980PBK